



**TEXTILE SELECTION** 



NYFAN 9004 ROMA MOCHA OUTSIDE / INSIDE



NYFAN 9203 IVORY OUTSIDE / CANVAS INSIDE




NYFAN 9202 POLAR WHITE OUTSIDE / CANVAS INSIDE






NYFAN 9009 SPACE BLACK OUTSIDE / INSIDE

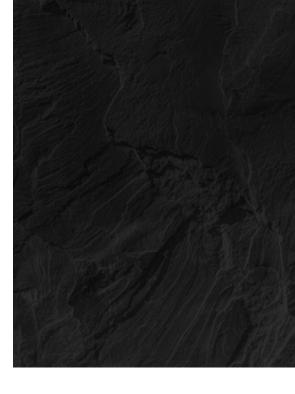

NYFAN 9006 STONE GREY OUTSIDE / INSIDE

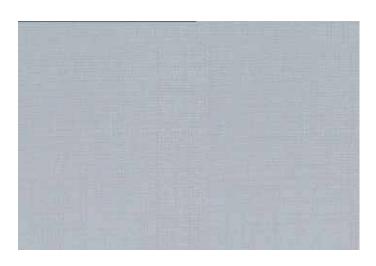

NYFAN 9201 LIGHT GREY OUTSIDE / CANVAS INSIDE





**NYFAN 9214**PINE GREEN OUTSIDE / IVORY CANVAS INSIDE




NYFAN 9215 ICE GREY OUTSIDE / CANVAS INSIDE



NYFAN 9012 ECRU OUTSIDE / INSIDE



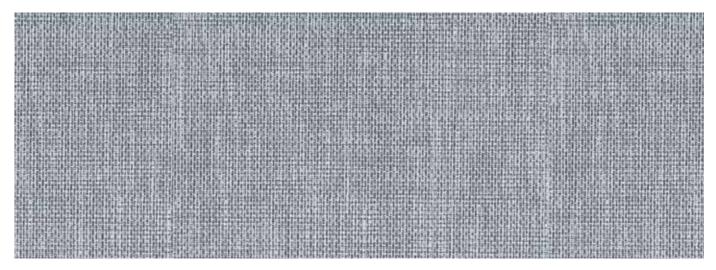

**NYFAN 9301** LIGHT GREY OUTSIDE / VINTAGE LINEN INSIDE

## **TECHNICAL SPECIFICATIONS**

TECHNICAL SPECIFICATIONS	STANDARDS	UNIT	VALUES
TYPE OF BASE FABRIC	EN-ISO2076	DTEX	HIGH TENACITY YARN
YARN SIZE	EN-ISO7211	DTEX	1100
YARN CONSTRUCTION IN WARP-WEFT	EN-ISO4602	N°/CM	8 X 8
BASE FABRIC WEIGHT	EN-ISO2286-2	G/M <sup>2</sup>	180
PVC WEIGHT	EN-ISO2286-2	G/M <sup>2</sup>	620
TOTAL WEIGHT	EN-ISO2286-2	G/M <sup>2</sup>	800
FABRIC THICKNESS	EN-ISO2286-3	M.M.	0,62
TENSILE STRENGTH - WARP	EN-ISO1421	N/5CM	2700
TENSILE STRENGTH - WEFT	EN-ISO1421	N/5CM	2700
TEAR STRENGTH - WARP	DIN53363	N	280
TEAR STRENGTH - WEFT	DIN53363	N	280
DIMENSIONAL STABILITY	INTERNAL TEST	%	1
COLD RESISTANCE	INTERNAL TEST	°C	-30
HEAT RESISTANCE	INTERNAL TEST	°C	+70
LIGHT FASTNESS	EN-ISO105B-02	VALUE	6
BENDING RESISTANCE	DIN53359-A	N°	100.000
WATER RESISTANCE	EN-ISO811		IMPERMEABILE WATER PROOF
WELDING ADHESION	EN-ISO2411	N/2CM	40

## **5 YEARS WARRANTY**











